


Exhaust-Hose Type TP

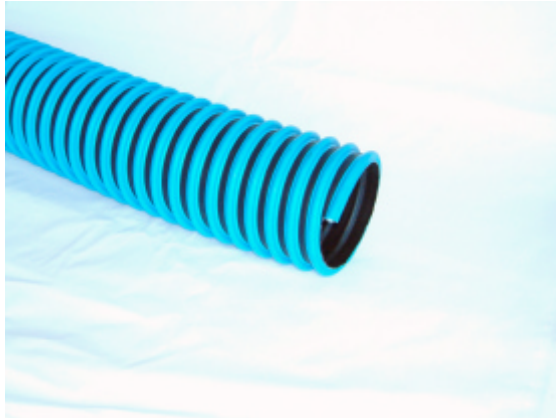

The **ecovent-exhaust hose TP** is made for a normal application in workshops and fire brigades.

It is high flexible, light and stable against gasoline, diesel gas, oil, grease or solvent.

The temperature-stability is up to 200°C at a proper application and 150°C at continuous operation. You can get this high quality exhaust hose with abrasion protection in its standard lengths 5,00m; 7,50m; 10,00m und 12,50m. Different lengths are only available on request.

technical facts:

Type	Inside-Ø [mm]	Outs.-Ø [mm]	Mass [kg]	Bend.-radius [mm]
TP 075	76	89	0,69	105
TP 100	102	115	0,87	190
TP 125	127	140	1,20	250
TP 150	152	165	1,44	300
TP 200	203	216	1,92	400

Underground Exhaust-Hose Type TU



This hose is a right choice among all underfloor unit hoses.

Its fully driven over ability give you a guarantee for a long lasting use. We have decided for a construction, without helical section that's why it gets up completely back after load without leaving a damage. The temperature stability for continuous operation is 180°C, colour black. Certainly this hose is resisitant against exhaust gas, oil, grease and solvent.

technical facts:

Type	Inside-Ø [mm]	Outs.-Ø [mm]	Mass [kg]	Bend.-radius [mm]
TU 051	51	72	0,94	102
TU 065	63	84	1,43	126
TU 075	76	98	2,08	152
TU 100	100	123	3,60	200

*The temperature information is related to a surrounding temperatur of 20°C and it is valid a stream velocity of max. 25 m/s. The bend radius will be listed on one imaginary middle line of the hose..

© by ecovent, 32312 Lübbecke, Germany, fon: +49.5741.3016-0. Technical changements reserved.