


Vehicle Exhaust Rail, Series AS



The **ecovent-exhaust rail**, type AS has been new developed and it sets a measure concerning quality, function and design.

Use it for the exhaust gas removal of workshop places in rows. So you need less hoses and you have an impression of a cleared up workshop.

It makes fun to use this system, because everything is well planned and simple done.

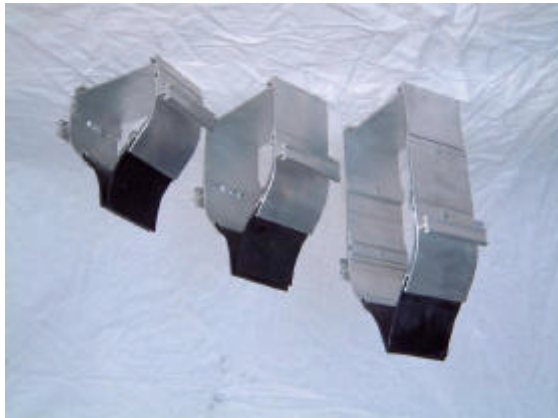

Tecnically this system has three different **standards** of rail cross section on one tracking gauge.

System AS 200 is mainly applied in car- and motorcycle workshops.

The middle size, AS 290, is the right choice for truck exhausts.

AS 440, is the system for special solutions with large airflow rates. Special measure: System AS 590

The highlits on one view:

- Extruded Aluminium, unlimited mounting length
- High-strength alloy F25 for elegant spans up to 6,00 m
- Fabric-strengthened neoprene sealing rim
- Suction trolley from 100 mm to 200 mm diameter
- High-quality production by standardisation of the construction units
- Optimally close lying sealing rim
- High-grade steel sliding sheet metals at the suction trolley
- Castors from PP with life span-lubricated industrial ball bearings
- Small load of the suction car by side guidance of the roles
- Registered with the German patent office under No.: 297 05 826.6

Tecnical facts:

Type	Area [cm ²]	Mass [kg]	Height [mm]	Width [mm]	Gauge [mm]	Strength
AS 200	200	7,0	225	198	188	F 25
AS 290	290	9,5	270	198	188	F 25
AS 440	440	12,0	370	198	188	F 25
AS 590*	590	15,0	470	198	188	F 25

*=neu

© by ecovent, 32312 Lübbecke, Germany, fon: +49.5741.3016-0. Technical changements reserved.